




- Following the FLIGHT instructions, install the 1st tread
- Find the run measurement(s) indicated in the shop drawings provided to you

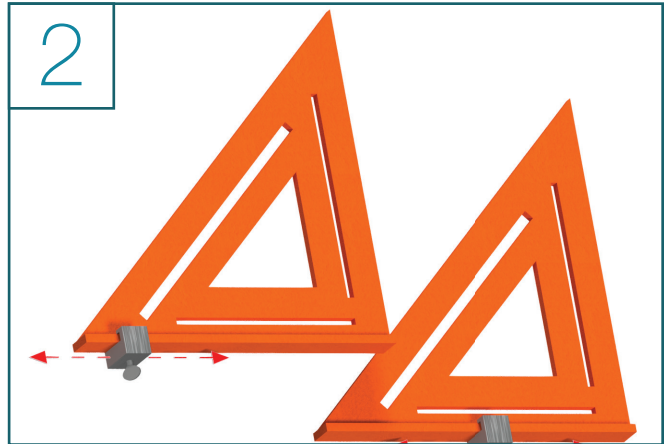


- Set the adjustment block to that dimension on both jigs

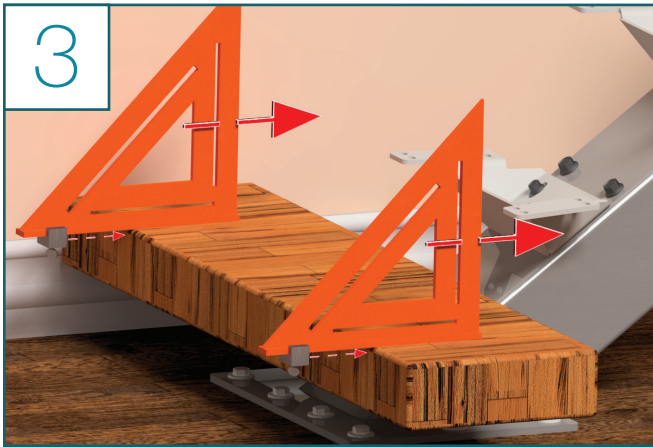

- Slide both jigs on to the first tread so that the adjustment block rests up against the nose of the tread

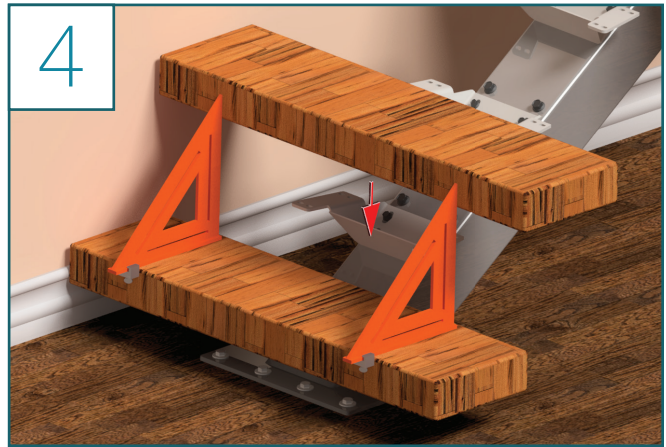

- Line up the next tread so that it is touching the flight jigs

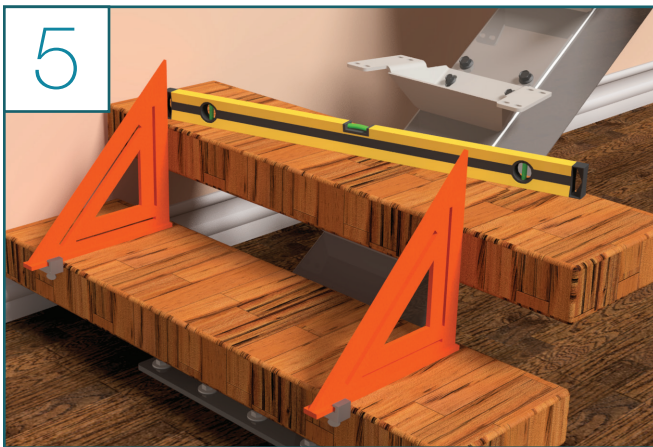

- Use a level to ensure the tread is plumb



- Using the supplied fasteners, secure the tread to the stringer bracket
- Repeat these steps for the rest of the flight